


NanoCath™

26G NICU-Comfort™ Safety I.V. Catheter



The Pathen Medical NanoCath™ is specially designed for the smallest patients. The 26 gauge, NICU-Comfort™ I.V. catheter is purpose-built to be tiny and flexible without occluding or sacrificing flow.

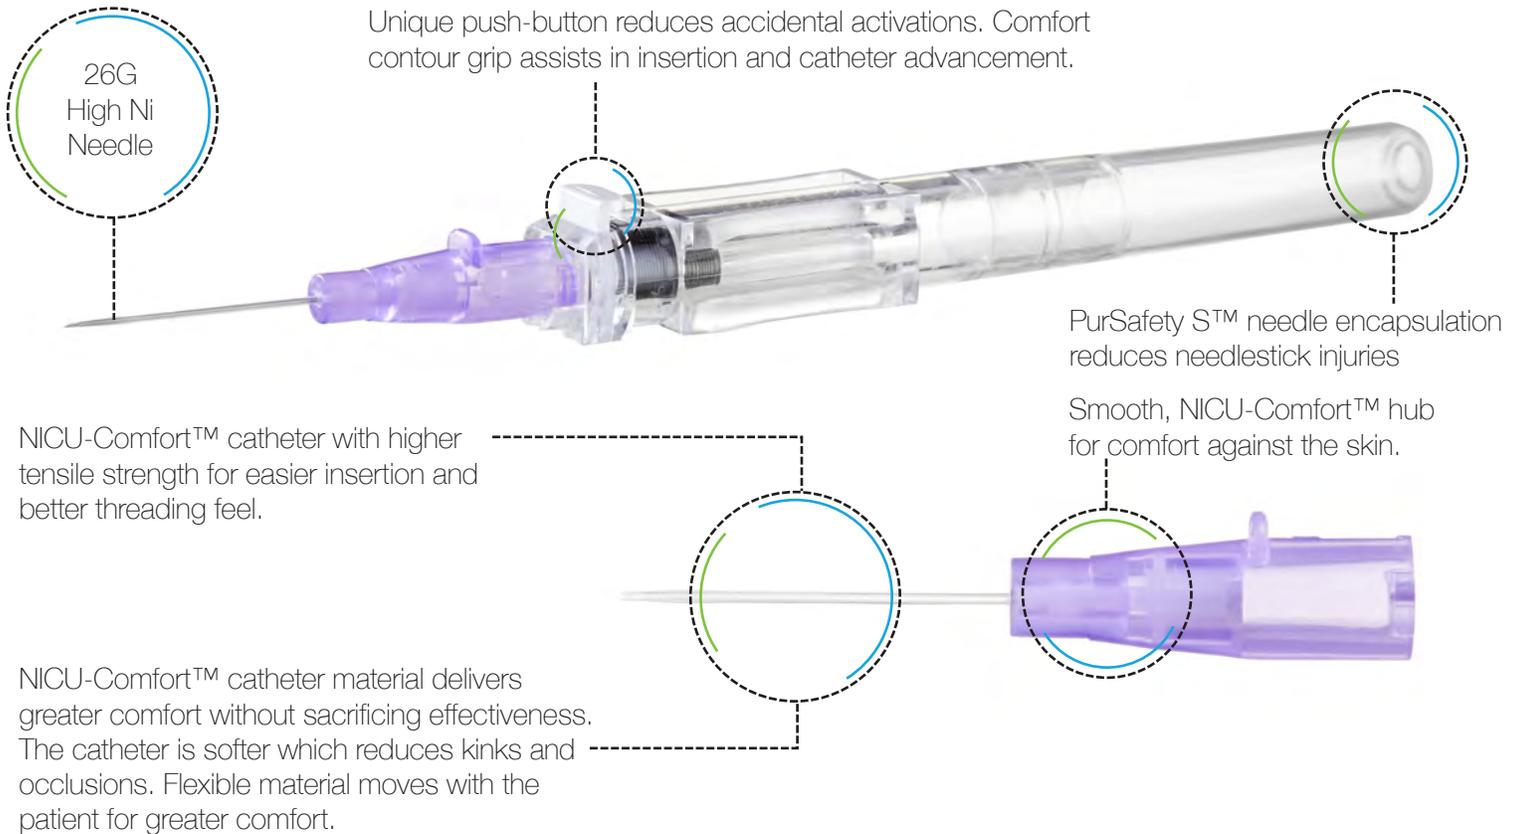

Pathen's NanoCath™ NICU-Comfort™ catheter material is pressure rated to 300 psi and maintains a fast flow rate of 10 mL/min. The patented catheter material is soft but has a high tensile strength for easier insertion and a smoother threading feel. Our soft catheter material moves and flexes with the patient.

NanoCath™

26G NICU-Comfort™ Safety I.V. Catheter



The Pathen Medical NanoCath™ 26 gauge NICU-Comfort™ safety catheter is constructed with:

- Kink and occlusion resistant NICU-Comfort™ PUR catheter material
- NICU-Comfort™ hub material for smooth comfort against patient skin
- Push-tab for automatic needle retraction and safe, shielded entrapment
- Instant flashback and clear-contour comfort grip

Sharp, Smooth Needle

The Pathen NanoCath™ uses sharp needle technology for ease of penetration and greater comfort during cannulation. Our siliconized ground stainless steel needle has a higher Nickel content and smooth surface for easy catheter insertion, threading-feel and advancement.



Part No.	Color	Gauge	Catheter Length (in)	Packaging
PS-843262	Purple	26	0.75	50/Box
PS-84326	Purple	26	0.56	200/Case

Hi-Ni Needle for Increased Sharpness	Pressure Rating (psi)	Flow Rate (mL/min)	Catheter Comfort Material
YES	300	10	NICU-Comfort™ PUR Safety catheter

Bimeco Group, Inc.
 200 Kelly Dr, Ste A
 Peachtree City, GA, 30269
 P 770.631.7761
 F 770.631.7793
customerservice@bimecogroup.com

